

**RETRACTABLE TANK WASHER (RTW)
FEATURES AND BENEFITS**

- Pneumatic retraction mechanism lowers and raises the tank cleaner from the tank eliminating the need for manual labor
- Variable stroke lengths for cleaning: 3, 4, and 6 ft. (0.9, 1.2 and 1.8 m)
- Easy-to-use control box/panel allows setting of multiple stopping points
- Control box/panel can be located away from the tank for safety or convenience
- Eliminates clogging resulting from residue build-up on nozzle hub when tank washers are permanently installed in the tank
- Optional isolation valve ensures liquid cannot escape from the tanks when tank washer is retracted
- Optional liquid valve and liquid pressure switch to control liquid flow and monitor water pressure

SPECIFICATIONS

Model	Retractable Tank Washer
Max. tank diameter:	40 ft. (12.2 m)
Operating pressure:	1000 psi (69 bar)
Flow rate:	44 gpm (170 lpm)
Cycle time:	2.1 to 11 min.
Max. temperature:	140°F (60°C)
Materials:	Wetted parts: 316 and 304 stainless steel, synthetic rubber hose, PTFE, Viton®*
Inlet connections:	1" NPT or BSPT (F)
Flanges:	4" 150# ANSI®
Stroke lengths:	3, 4, and 6 ft. (0.9, 1.2 and 1.8 m)

*High-pressure version only.

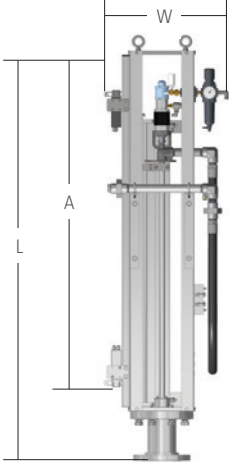


IDEAL FOR CLEANING:

- Cosmetic tanks
- Food vats
- Pharmaceutical vessels
- PTFE, latex, acrylic, polymer, paint and other chemical reactors



DIMENSIONS AND WEIGHTS

Retractable Tank Washer	Model No.	L in. (mm)	W in. (mm)	Min. Tank Opening in. (mm)	Weight lbs. (kg)
	RTW	30 (750)	10 (254)	3.75 (95)	187 to 253 (85 to 115)

ORDERING INFORMATION

Call your local spray expert for application assistance or to place an order.



PAWIN Engineering Co., Ltd.
 168 อาคาร Axiom 1 บ. 7 ถ. ซี่งแก้ว ต. บางพลีใหญ่
 อ. บางพลี จ. สมุทรปราการ 10540

